Become a smart home expert



Netatmo

pro

A brand of **[] legrand**

Netatmo © 2020 All rights reserved. Apple is a trademark of Apple Inc., registered in the U.S. and other countries. HomeKit is a trademark of Apple Inc. Use of the Works with Apple HomeKit logo means that an electronic accessory has been designed to connect specifically to iPod touch, iPhone, or iPad, respectively, and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards. App Store is a service mark of Apple Inc., registered in the U.S. and other countries. Google Play and the Google Play logo are trademarks of Google Inc.

Contents

4 Smart heating

6 Smart thermostat

- 8 Smart modulating thermostat
- 10 Additional smart radiator valve

12 Security

- 14 Smart outdoor camera
- 16 Smart indoor camera
- 18 Smart video doorbell
- 20 Smart door and window sensors
- 20 Smart indoor siren
- 21 Smart alarm system

22 Specifications

Our Netatmo Pro programme

+4

4-year warranty

Free extended warranty for Pro members



New customers

Get listed on the Netatmo Pro website to find new customers

pro.netatmo.com



Telephone support

Dedicated support for you: Tel: 0333 130 1114 E-mail: uk-uisales@legrand.co.uk Monday - Friday 8.30am - 4.30pm

Dedicated support for your customer: Tel: 0333 130 1115 Monday - Friday 8.30am - 4.30pm

Our products, our commitment

ALL-INCLUSIVE

No subscription fees or hidden costs

ALL-SECURE

Data protection and privacy guaranteed

ALL-UPGRADEABLE

Free upgrades and features added regularly









Heating within reach

Option to control Netatmo smart heating through the Netatmo app or the Home + Control app from Legrand.



Scan to download the app:

NTH-PRO

Smart thermostat

Daily comfort and energy savings



For individual boilers

Benefits for you

M High compatibility Compatible with most boiler models, whatever the energy used.

Check compatibility at: check.netatmo.com.

Easy to set-up in under one hour Just as easy as installing a traditional thermostat. Select wired or wireless installation.

Upgradeable with the additional smart radiator valves

Add up to twenty radiator valves in ten different rooms.

Product benefits

闘 Even more savings with the heating schedule and the 'Away' and 'Frost protection' modes The thermostat creates a heating schedule tailored to the user's daily routine based on five questions on day-to-day usage. In addition to this schedule, there are 'Away' and 'Frost protection' modes, which automatically adjust the heating when the user is away for longer periods of time. Ē Remote control from a smartphone, tablet or computer 俗 Auto-Adapt feature: always the right temperature, whatever the weather The thermostat changes the heating according to the outdoor temperature and the heating characteristics of the home. Tools for monitoring and optimising energy consumption The user can view their consumption history and consult a personalised Energy Savings Report to monitor and optimise energy consumption.










The Netatmo smart thermostat is compatible with most boilers and heat pumps

The thermostat connects via radiofrequency to its relay. The relay connects via Wi-Fi to the internet and enables remote control from the app. The smart thermostat is compatible with most boiler models (electricity, gas, oil, wood) and heat pumps. You can easily install it as a new thermostat, or to replace an existing wired one.

Check system compatibility on check.netatmo.com

Example of a wireless installation:

(also works as a wired thermostat installation)

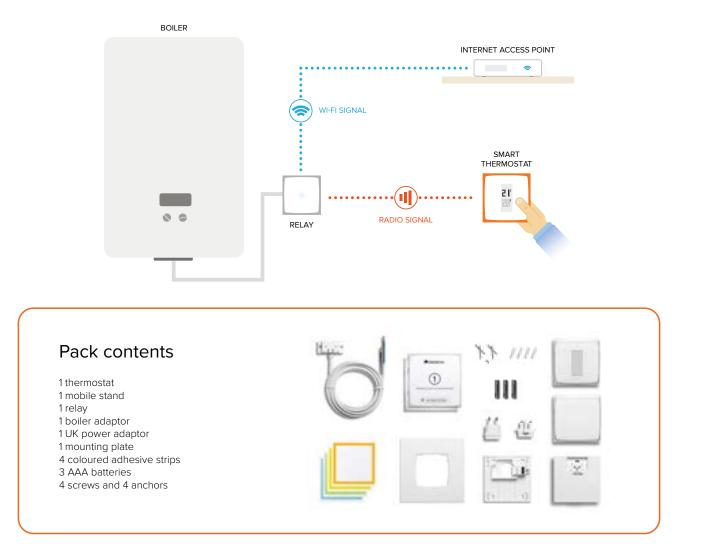

OTH-PRO

Smart modulating thermostat

Daily comfort and energy savings combined



Benefits for you

M High compatibility

The smart modulating thermostat is compatible with most OpenTherm system and modulating boilers, regardless of the energy it uses (gas, oil, wood).

For individual OpenTherm boilers

OpenTherm*

🗹 Easy to set-up in one hour

Just as easy as installing a traditional thermostat, the modulating thermostat is wireless so that it can be placed anywhere in the home.

Upgradeable with the additional smart radiator valves

Add up to twenty radiator valves in ten different rooms.

Product benefits

 Even more savings with the heating schedule and the 'Away' and 'Frost protection' modes The thermostat creates a heating schedule tailored to the user's daily routine based on five questions on day-to-day usage. In addition to this schedule, there are 'Away' and 'Frost protection' modes, which automatically adjust the heating when the user is away for longer periods of time.
 Remote control from a smartphone, tablet or computer The thermostat is controlled using the Home + Control app.
 A smart thermostat that adapts and keeps users updated in real time The Auto-Adapt feature and the OpenTherm technology take into account the weather and heating characteristics of the home to maintain the right temperature.

Domestic hot water control for OpenTherm system boilers The modulating thermostat regulates the domestic hot water supply in OpenTherm system boilers. It enables the remote activation or deactivation of hot water supply.

Apple HomeKit








The Netatmo smart modulating thermostat is compatible with most OpenTherm boilers, regardless of the energy used (gas, oil, wood).

The modulating thermostat connects via radiofrequency to its relay. The Netatmo relay connects via Wi-Fi to the internet, enabling remote control from the app. The modulating thermostat creates a schedule based on lifestyle habits while changing the temperature of the water in the circuit to adjust the temperature of the home. If there are any problems with the boiler, it will notify the user of the exact error detected for easy diagnosis.

It can also regulate domestic hot water supply in OpenTherm system boilers via a separate schedule in the app. You can install it easily as a new thermostat, or as a replacement for an existing one.

The modulating thermostat can be installed wirelessly:

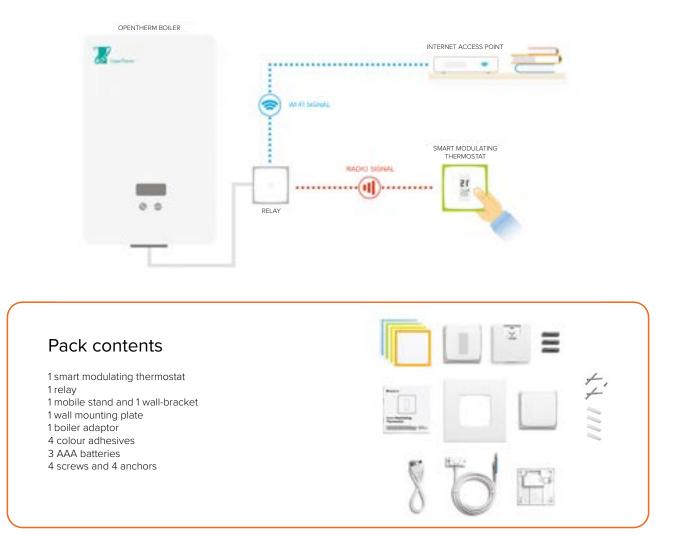

NAV-PRO

Additional smart radiator valve

The right temperature in every room at all times



Benefits for you

High compatibility

Compatible with 90%* of hot-water radiators thanks to the adaptors provided. Ten adaptors are included in the pack. Check compatibility at **check.netatmo.com**.

Easy to set-up in 10 minutes

Simply replace the existing thermostatic valves - even in winter when the radiators are being used.

Upgradeable with additional smart radiator valves

Up to twenty radiators can be controlled in ten different rooms for even more efficiency.

Product benefits

Heating tailored to the user's daily routine thanks to a room-by-room schedule Based on five questions on day-to-day usage, the radiator valves create a room-by-room heating schedule that's comfortable and economical.

Remote control from a smartphone, tablet or computer

Smart features for greater energy savings

• Auto-Adapt feature: the radiator valves change the heating according to the outdoor temperature and the heating characteristics of the home.

• Open Window Detection feature: the radiator valves automatically switch the radiators off in a room where the windows are open.

Tools for monitoring and optimising energy consumption

The user can view their consumption history and consult a personalised Energy Savings Report to monitor and optimise energy consumption.

* Estimated rate of compatibility between Netatmo smart radiator valves and radiators in Europe thanks to the ten adaptors provided in this package and the adaptor packs sold separately.









The additional smart radiator valves connect via radiofrequency to the relay of the thermostat. The Netatmo relay connects via Wi-Fi to the internet and enables remote control from the app.


Number of radiator valves per installation

If your customer already has a Netatmo smart thermostat, they can simply check the settings in the Netatmo app to find out how many smart radiator valves they can add. If you install a new Netatmo smart thermostat for your customer, you can connect up to 20 smart radiator valves.

Check system compatibility on check.netatmo.com

Example of an individual heating installation:


Using a Netatmo thermostat

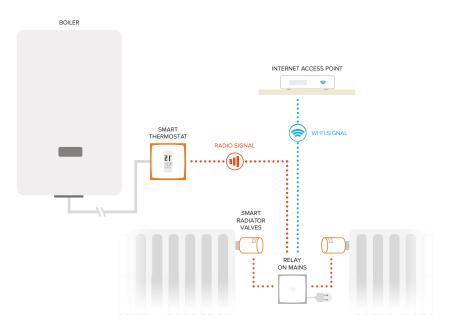







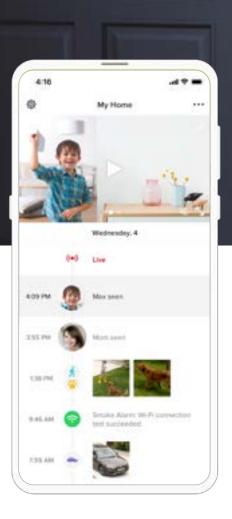



Prevents possible trespassing on the property

Option to control the entire security system through the Netatmo app



NOC-PRO

Smart outdoor camera

Alerts users in real time so action can be taken if there is an intruder on the property

Benefits for you

High compatibility

The camera can be installed as a replacement for existing exterior lighting.

Create a smart security system with ease using several cameras

All indoor and outdoor cameras are managed through the same app: Netatmo Security. In this app, users can simply switch from one camera to another to see the events of the day.

(((⊅

Also available with a built-in siren

NOC-S-PRO Smart outdoor camera with siren This product comes with the added bonus of a 105-dB alarm to deter intruders.

Product benefits

[k]	Immediate smartphone notifications when intruders are detected The camera can tell the difference between a person, an animal, a vehicle and a harmless movement.
\mathbb{Z}	With the Alert-Zones feature, users will only receive useful alerts Define the zones to be monitored and for which users will receive alerts.
Ĵ	Built-in smart lighting system for even more efficiency The floodlight lights up the path at night and can even deter intruders.
Ŕ	Subscription-free with no hidden costs Videos, their storage and all features relating to the camera are fully available without subscription. App updates and new features are free, so there are no hidden costs.





The smart outdoor camera connects to the internet via Wi-Fi and can be easily installed in place of an existing light.

Your customer has an existing outdoor light:

 \rightarrow Installation video available at: https://pro.netatmo.com/uk/presence/installation Your customer does not have an existing outdoor light or wants you to install the smart outdoor camera in a different location:


 \rightarrow Install the product like an outdoor light.

Requirements:


 $\tilde{\sim}$

Wi-Fi network with high-speed internet connection required (minimum upload/download speed required: 25 Kb/s per Camera). Public hotspots are not supported.

Recommendations:



Height: 2.5 to 4 metres



Tilt angle: 30°





Netatm0

NSC-PRO

Smart indoor camera

Alerts users in real time so action can be taken if there is a break-in

Benefits for you

M Easy set-up in a few minutes

Place the camera inside, facing the entrance of the customer's home. Plug it in and connect it to Wi-Fi via the app.

Design a smart alarm system with ease

Create a smart alarm system by combining the indoor siren, the door and window sensors and the indoor camera. This Netatmo smart alarm system with camera offers full protection for the home.

Product benefits



Real-time alerts in the event of a break-in thanks to facial recognition

Familiar face or stranger? A harmless movement? With facial recognition and detailed notifications, the camera only sends alerts when necessary.

ß

6

Subscription-free with no hidden costs

Videos, their storage and all features relating to the camera are fully available without subscription. App updates and new features are free, so there are no hidden costs.

User privacy is protected

The camera recognises and respects users' privacy with the option of deactivating video recording when a familiar face is recognised.









The smart indoor camera connects to the internet via Wi-Fi and is easy to set up.

 \rightarrow Installation video available at: https://pro.netatmo.com/uk/welcome

Requirements:




Wi-Fi network with high-speed internet connection required (minimum upload/download speed required: 25 Kb/s per Camera). Public hotspots are not supported.

Indoor use only.

 $[] \leftrightarrow)$ Keep away from sources of heat.

Recommendations:

Place the smart indoor camera on a table or shelf facing the front door.



Pack contents

1 smart indoor camera

- 1 USB cable
- 1 UK power adaptor
- 1 microSD card (already inserted in the camera)





NDB-PRO

Smart video doorbell

See who's at the door and answer from anywhere

Benefits for you

High compatibility

Simply install a module on the existing chime, then replace the current doorbell's button with the smart video doorbell.

Extensive electrical compatibility

The smart video doorbell is compatible with most electrical installations (8-24 V and 230 V), which means it can replace any wired doorbell that has a chime.

Mo battery to change

The smart video doorbell is powered using the cables of the existing doorbell so it doesn't need batteries to work.

Product benefits



Always home, wherever we are

When a visitor rings the smart video doorbell, the user can see and speak to them in real time via a smartphone, whether they're at home or on the other side of the world.



Maximum protection of the front door

Thanks to the person detection and Alert-Zones features, the smart video doorbell detects if someone is lurking on the front doorstep. Is it an intruder? With the built-in loudspeaker, it's easy to scare them away.



No subscription and access to all features

A one-time purchase with no hidden fees. Videos are stored for free on the microSD card included, and users have the option to use a Dropbox account or a personal FTP server as additional storage.



See who is at the door 24 hours a day $% \left(\frac{1}{2} \right) = \left(\frac{1}{2} \right) \left(\frac{1}{2} \right)$

The built-in infrared night vision ensures around-the-clock protection day and night, allowing users to see what's happening on the doorstep even when it's pitch-black outside.





Thanks to its 8-24 V and 230 V compatibility, the smart video doorbell is very easy to install as a replacement for an existing wired doorbell. It also allows users to keep their existing chime.

Requirements:



A private Wi-Fi network



An existing wired doorbell and chime




An electrical installation between 8-24 V & 230 V


Use our online tool to check the compatibility of your customers' installations with the smart video doorbell: https://check.netatmo.com/en-us/security/doorbell

Installation:

1) The chime is located near the door



2) The chime is located in the electrical panel



The smart video doorbell also adapts to any kind of entrance. For example, if the doorbell is positioned at an angle which would limit the camera's field of view, the smart video doorbell can be installed on the optional 25° bracket.

Pack contents

1 smart video doorbell 1 microSD memory card (already inserted in the product) 1 wall mounting plate 125° bracket 1 finish plate 1 chime module

1 wire connector 1 drilling template 1 additional fuse Screws and anchors 1 HomeKit card 1 user guide



DTG-PRO

Smart door and window sensors

Alert triggered even before a break-in occurs

NIS01-PRO

Smart indoor siren

Deters intruders to better protect the home against burglaries



Netatro

Benefits of the sensors



Users are alerted even before a break-in occurs The smart door and window sensors detect

vibrations and the opening of doors and windows, sending an alert to the smartphone even before a break-in occurs.



Users are notified if a window has been left open

The smart door and window sensors can send alerts to the smartphone when a door or window has been open for too long.

Benefits of the siren

⊴)))

Automatic 110-dB alarm in the event of a break-in Using facial recognition, the camera sends a warning to the smartphone if there is a break-in while the siren automatically sets off its 110-dB alarm.



Automatic alarm activation and deactivation The alarm automatically activates and deactivates when the user leaves and returns to the house.



Pre-recorded sounds to simulate a presence in the home

The siren includes a whole range of domestic sounds that simulate a presence in the home in case of a break-in.

Smart alarm system with camera

Protect homes with a complete security solution that can prevent break-ins

Benefits for you

Create a smart alarm system for full protection

Create a smart alarm system by combining the indoor siren, the door and window sensors and the indoor camera. This alarm system with camera offers full protection for the home.

🗹 Easy set-up

Download the Netatmo app to your smartphone to connect the various elements. Simply place the smart indoor camera and smart indoor siren in the hall and fix the smart door and window sensors to the doors and windows.





The alarm system automatically arms when nobody is home.



Real-time alerts is sent on smartphone with the video of the intrusion.



Break-in detected! The siren goes off automatically.



The system disarms automatically when a family member is recognised thanks to the camera's facial recognition.

Pack contents

1 smart indoor camera 3 doors and windows sensors 1 smart indoor siren





+

Specifications



NTH-PRO

NTH-PRO Smart thermostat

PRODUCT DESCRIPTION

Programmable thermostat with smart features. E-paper display. Translucent plexiglass cube designed by Starck. Can be customised with one of four available colours. Temperature can be directly adjusted on the thermostat. Designed for indoor use only.

PRODUCT SIZE

Thermostat and relay: 83 x 83 x 22 mm

SENSORS AND MEASUREMENTS

Temperature (measurements): Ranges from 0°C to 50°C (\pm 0.1°C)

Temperature (setpoint): Ranges from 5°C to 30°C (\pm 0,5°C) Unit: °C

POWER

Thermostat: 3 AAA batteries with a 2-year lifespan

Relay: 220/240 V

SETUP & COMPATIBILITY

Dry contact thermostat and relay, voltage free (ON/OFF)

OTH-PRO Smart modulating thermostat

PRODUCT DESCRIPTION

Programmable thermostat with smart features. E-paper display. Translucent plexiglass cube designed by Starck. Can be customised with one of four available colours. Temperature can be directly adjusted on the thermostat. Designed for indoor use only.

PRODUCT SIZE

Thermostat & relay: 83 x 83 x 22 mm

SENSORS AND MEASUREMENTS Temperature (measurements):

Ranges from 0°C to 50°C (± 0.1°C)

Temperature (setpoint):

Ranges from 5°C to 30°C (± 0,5°C)

Unit: °C

POWER

Thermostat: 3 AAA batteries with a 2-year lifespan Relay: 220/240 V

Reldy. 220/240 V

SETUP & COMPATIBILITY Dry contact thermostat and relay, voltage free (ON/OFF) Switching current: max. 4 A



OTH-PRO

Switching current: max. 4 A

Switching voltage: max. 250 VAC Switching power: max. 120 VA Power factor: $\cos \phi > 0.8$

PACK CONTENT

1 thermostat, 1 mobile stand, 1 relay, 1 boiler adaptor, 1 UK power adaptor, 1 mounting plate, 4 coloured adhesive strips, 3 AAA batteries, 4 screws and 4 anchors

REQUIREMENTS

High-speed wireless internet connection. Public hotspots not supported

CONNECTIVITY SPECIFICATIONS Between the relay and the Internet box: Wi-Fi 802.11 b/g/n (2.4GHz). Supported security: Open/WEP/WPA/WPA2-

personal (TKIP and AES) Between the thermostat and the relay: long-range radio (868 MHz)

mostat Switching voltage: max. 250 VAC

Switching voltage: max. 230 VAC Switching power: max. 120 VA Power factor: $\cos \phi > 0.8$

PACK CONTENT

1 smart modulating thermostat, 1 relay, 1 mobile stand and 1 wall-bracket, 1 wall mounting plate, 1 boiler adaptor, 4 colour adhesives, 3 AAA batteries, 4 screws and 4 anchors

REQUIREMENTS High-speed wireless internet connection. Public hotspots not supported

CONNECTIVITY SPECIFICATIONS Between the relay and the Internet box: Wi-Fi 802.11 b/g/n (2.4GHz). Supported security: Open/WEP/WPA/ WPA2-personal (TKIP and AES) Between the thermostat and the relay: long-range radio (868 MHz)



NAV-PRO

NAV-PRO Additional smart radiator valves

PRODUCT DESCRIPTION

Thermostatic valve with smart features. E-paper display. Translucent plexiglass cylinder designed by Starck. Can be customised with one of four available colours. Temperature can be directly adjusted on the Valve. Designed for indoor use only.

PRODUCT SIZE

Valve: 80x58 mm.

SENSORS AND MEASUREMENTS

Temperature (measurements): Ranges from 0°C to 50°C (± 0.5°C)

Temperature (setpoint): Ranges from 5°C to 30°C (\pm 0,5°C) Unit: °C

POWER

Valve: 2 AA batteries with a 2-year lifespan PACK CONTENT

1 Netatmo smart radiator valve, 10 radiator adaptors (M30x1.5, M30x1.0, M28x1.5, Danfoss RAVL, Danfoss RA, Giacomini, Vaillant, Petinarolli, Danfoss RAV, Standard M28x1.0) to suit most hot water radiators by brands including Danfoss, Heimeir, Honeywell and more, 4 coloured adhesive strips, 2 AA batteries for the additional smart radiator valve, 1 adaptor selection guide, 1 installation guide

REQUIREMENTS

The Netatmo smart radiator valve works only with a Netatmo smart radiator valves starter pack or a Netatmo smart thermostat.



Netatmo Energy app

FREE APP No subscription required. Application available on the App Store and Google Play. Free access to your personal dashboard online. Accessible from multiple devices.



COMPATIBLE WITH IOS / ANDROID The latest version of iOS or iPadOS is recommended. A recent version of Android with access to Google Play is recommended.











NOC-PRO

NOC-PRO and NOC-S-PRO

Smart outdoor camera

100° field of view, livestream, video Full

infrared night vision: 15 m / 49 ft

5 x 20 x 11 cm / 2 x 8 x 4.3 in

Product size with wall mount:

11 x 23 x 17.5 cm / 4.3 x 9 x 6.9 in

HD 1080p, encoding H.264, microphone, smart floodlight: 12 W dimmable white LED,

100-240 V, replaces any existing light fixture

storage and option to save to Dropbox or FTP

Free video storage: Local microSD card

PRODUCT DESCRIPTION

PRODUCT SIZE

Only NOC-S-PRO

Siren: 105 dB

POWFR

NOC-S-PRO

PACK CONTENTS

WPA/WPA2-personal

SECURITY

FRFF APP

1 smart outdoor camera, 1 microSD card

CONNECTIVITY SPECIFICATIONS

The latest encryption (IPsec, TLS)

NO SUBSCRIPTION FEES

(already inserted in the camera), 1 mounting

plate, 1 allen key, wall screws and anchors,

High-speed wireless internet connection

needed. Public hotspots not supported

Wi-Fi 802.11 b/g/n (2.4 GHz), Open/WEP/

protective cover, 1 user guide, 1 QR code card

NDB-PRO

NBU-AS-PRO

NBU-AS-PRO Smart alarm system with camera

See individual specifications for; NSC-PRO, NIS01-PRO and DTG-PRO.

NSC-PRO Smart indoor camera

PRODUCT DESCRIPTION

Livestream, video Full HD 1080p, encoding H.264, microphone, infrared night vision; 8 m / 26.2 ft Designed for indoor use only

PRODUCT SIZE

45 x 45 x 155 mm / 1.8 x 1.8 x 6 in

POWER

Needs to be plugged in with the included power adapter

FREE VIDEO STORAGE

Local microSD card storage and option to save to Dropbox or FTP

PACK CONTENTS

1 smart indoor camera, 1 microUSB power adapter, 1 microSD card (already inserted in the camera)

CONNECTIVITY SPECIFICATIONS

High-speed internet connection needed. Public hotspots not supported

Ethernet RJ-45 10/100 Mbits, Wi-Fi 802.11 b/g/n (2.4 GHz), Open/WEP/WPA/WPA2personal

The sensors only work with the Netatmo

Wireless connection between the sensors

and the Netatmo smart indoor camera:

smart indoor camera, sold separately

Maximum 12 sensors per camera

CONNECTIVITY SPECIFICATIONS

SECURITY The latest encryption (IPsec, TLS)

NDR-PRO Smart video doorbell

PRODUCT DESCRIPTION

Livestream, Full HD 1080p, HDR, 140° field of view, speaker and microphone, infrared night vision, tamper detection

WEATHERPROOF

Designed for outdoor use (IP44)

PRODUCT SIZE 5.3 x 1.8 x 1.1 in

POWER

8-24 V & 230 V, replaces a wired doorbell button and requires a wired chime. Keep your existing installation

VIDEO STORAGE

Local storage on microSD card and option to save to Dropbox or FTP server

PACK CONTENTS

1 smart video doorbell, 1 microSD memory card (already inserted in the product), 1 wall mounting plate, 1 25° bracket, 1 finish plate, 1 chime module, 1 wire connector, 1 drilling template, 1 additional fuse, Screws and anchors, 1 HomeKit card, 1 user guide

are not supported

CONNECTIVITY SPECIFICATIONS Wi-Fi 802.11 b/g/n (2.4 GHz), Open/WEP/

Doors and windows sensors PRODUCT DESCRIPTION

Monobloc waterproof sensors with vibration, motion and open/closed state detection

PRODUCT SIZE

DTG-PRO

76 x 15.8 x 30.4 mm / 29.9 x 6.2 x 12 inch POWER

2 AAA batteries (included)

PACK CONTENTS 3 smart door and window sensors, strong adhesive strips, 3 x 2 AAA batteries

NIS01-PRO **Smart indoor siren**

PRODUCT DESCRIPTION 110 dB alarm, pre-recorded sounds to simulate presence, vibration sensor for tamper detection.

Designed for indoor use only

PRODUCT SIZE 130 mm (diameter) x 35 mm (depth) / 5.1 in(diameter) x 1.4 in (depth)

POWER Battery-operated or hardwired through microUSB cable (not included)

Netatmo Security app

FREE APP No subscription required. Application available on the App Store and Google Play Free access to your personal dashboard online. Accessible from multiple devices



long-range radio

REQUIREMENTS

PACK CONTENTS

1 indoor siren, 4 AA batteries with 2-year lifespan (already inserted in the product), 1 mounting kit

REQUIREMENTS

The smart indoor siren only works with the Netatmo smart indoor camera, sold separately. It needs to be installed indoors, in the same room as the camera. Maximum 1 siren per camera

CONNECTIVITY SPECIFICATIONS Wireless connection with the smart indoor camera via Bluetooth Low Energy (BLE)

COMPATIBLE WITH IOS / ANDROID The latest version of iOS or iPadOS is recommended. A recent version of Android with access to Google Play is recommended.



23

REQUIREMENTS

High speed internet access. Public hotspots

WPA/WPA2-personal

SECURITY The latest encryption (IPsec, TLS)

Contact details

United Kingdom

Great King Street North, Birmingham, B19 2LF

Customer Services: Tel: +44 (0) 345 605 4333 E-mail: legrand.sales@legrand.co.uk

Quotations and Technical Support: Tel: +44 (0) 370 608 9020 E-mail: uk-uisales@legrand.co.uk

Republic of Ireland: Tel: 01 295 9673 Fax: 01 295 4671 E-mail: legrand.sales@legrand.co.uk





Dlegrand®

Head office (UK and Ireland): Legrand Electric Limited Great King Street North, Birmingham, B19 2LF Tel: +44 (0) 370 608 9000 Fax: +44 (0) 370 608 9004 Website: www.legrand.co.uk Netatmo Pro product guide.pdf 11/2020

In accordance with its policy of continuous improvement, the Company reserves the right to change specifications and designs without notice. All illustrations, descriptions, dimensions and weights in this catalogue are for guidance and cannot be held binding on the Company. All contents and design presentation included in this publication are © Legrand Electric Limited. All rights reserved. 2020