



Save time,
save money....
whatever the
application

Contact details

United Kingdom

Great King Street North,
Birmingham, B19 2LF

Customer Services:

Tel: 0845 605 4333 Fax: 0845 605 4334
E-mail: legrand.sales@legrand.co.uk

Technical Support:

Tel: 0870 608 9020 Fax: 0870 608 9021
E-mail: technical.uk@legrand.co.uk

Republic of Ireland

15/16 Holly Avenue,
Stillorgan Industrial Park,
Stillorgan, Co. Dublin

Customer Services and Technical Support:

Tel: 01 295 4465 Fax: 01 295 4671
E-mail: info@legrand.ie

The Legrand logo is a
registered trademark
of the Legrand group
of companies.



Head office (UK and Ireland):

Legrand Electric Limited
Great King Street North, Birmingham, B19 2LF
Tel: 0870 608 9000 Fax: 0870 608 9004
Website: www.legrand.co.uk

Distributor:



Earth clamps now have a new twist



TENBY® RAPID CLAMP ULTRA
/ MINI GUIDE



02992a - Earth Clamp mini guide. 08-2009. 10K

POWERED BY SPECIALISTS



www.legrand.co.uk


Fast, reliable connections... with a new twist!

Tenby® Rapid Clamps, the UK market leader, have been protecting people for over forty years. The latest addition to the range, Tenby Rapid Clamp Ultra, now offers the same trusted reliability in a fraction of the time.

For commercial and residential applications in both new and existing installations, Tenby Rapid Clamp Ultra creates earthing connections with a simple new fixing method that makes fitting them in hard to reach areas easier than ever.



The unique 'twist' fixing method is up to 5 times faster when compared with traditional clamps. So for mains incomer pipes, boiler replacement, special locations or supplementary bonding in pre-17th Edition installations, earthing just got a whole lot easier!

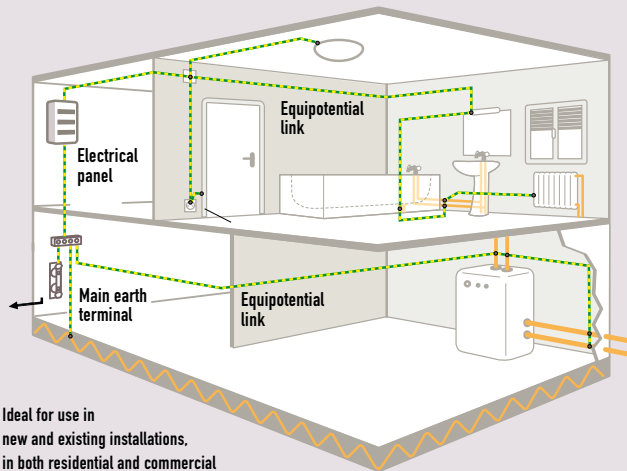

Ideal for use in new and existing installations, in both residential and commercial environments



Simply press the clamp on to the pipe and twist using one hand



The clamp grips the pipe securely without additional aid



Lock into place with the central screw



Create long-lasting, reliable earth connections in seconds



Tenby® Rapid Clamp Ultra earth clamps



0343 85




0343 86



0343 87

Conform to BS 951 : 2009
Available in three sizes
Suitable for dry, non corrosive atmospheres and corrosive or humid conditions
Resistance of incandescent wire 960° C
Resistivity of 0.4 mΩ
Colour : grey
Polyamide
Safe, intuitive 1/4 turn mounting ensuring an excellent, lasting equipotential link

Pack	Cat. Nos.	Earthing clamps for all conditions					
		Terminal size : A – D (2.5 – 10 mm ²)					
		Maximum earth conductor 1 x 10 mm ²					
		Pipe diameter		Connection cross-section			
		Ø min. (mm)	Ø max. (mm)	min. (mm ²)	max. (mm ²)		
	NEW	20	0343 85	12	16	2.5	6
		10	0343 86	18	22	2.5	16
		10	0343 87	28	32	2.5	16



For Tenby® Rapid clamps

see current Legrand catalogue